


COUNTER SUNK SHEETNUT



TYPE CRS

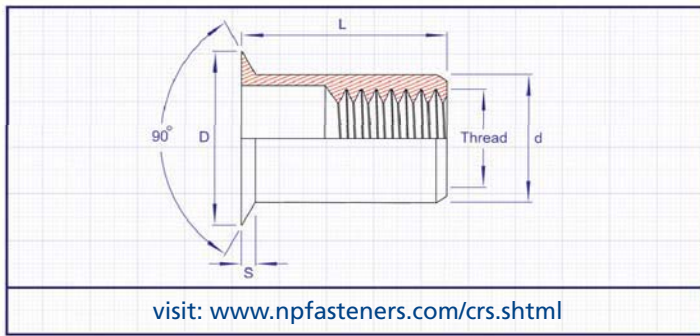

SPECIFICATION

OTHER GRIP RANGES AVAILABLE, PLEASE CALL FOR DETAILS.

Thread & Pitch	Grip Range	Hole Size +0.1 - 0.0	D	d	S	L	Height when Installed (Guide Only)
M3 x 0.5	20 (1.0 - 2.0)	5.0	7.0	5.0	1.0	8.5	5.5
M4 x 0.7	25 (1.0 - 2.5)	6.0	8.0	6.0	1.0	10.5	6.5
M5 x 0.8	30 (1.0 - 3.0)	7.0	9.0	7.0	1.0	12.0	7.0
M6 x 1.0	30 (1.0 - 3.0)	9.0	11.0	9.0	1.0	14.0	8.5
M8 x 1.25	30 (1.0 - 3.0)	11.0	13.0	11.0	1.0	16.0	10.0
M10 x 1.5	40 (1.6 - 4.0)	13.0	15.7	13.0	1.6	22.0	14.5

INFORMATION

MATERIALS

Mild Steel,
(Stainless Steel To Special Order),
(Aluminium To Special Order).

FINISHES

Zinc Trivalent Passivate (SZ).

PART NUMBER EXAMPLE


Type / Thread /
Grip Range / Finish =

CRS - M6 - 30 - SZ

(Counter Sunk Closed End, M6,
1.0 to 3.0mm Panel, Steel, Zinc)

Splined Body Versions Available. Contact our sales department for further details.

FLAT HEAD SHEETNUT

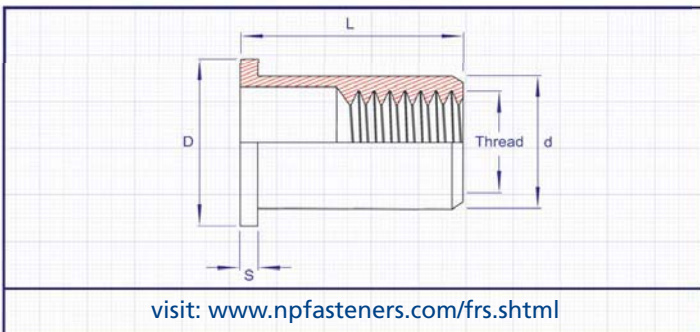

TYPE FRS



SPECIFICATION

OTHER GRIP RANGES AVAILABLE, PLEASE CALL FOR DETAILS.

Thread & Pitch	Grip Range	Hole Size +0.1 - 0.0	D	d	S	L	Height when Installed (Guide Only)
M3 x 0.5	18 (0.3 - 1.8)	5.0	8.0	5.0	0.75	9.0	5.5
M4 x 0.7	20 (0.3 - 2.0)	6.0	9.0	6.0	0.75	10.5	6.0
M5 x 0.8	30 (0.5 - 3.0)	7.0	10.0	7.0	1.0	14.0	8.0
M6 x 1.0	30 (0.5 - 3.0)	9.0	13.0	9.0	1.5	16.0	9.0
M8 x 1.25	35 (0.5 - 3.5)	11.0	16.0	11.0	1.5	17.0	10.0
M10 x 1.5	35 (0.8 - 3.5)	13.0	19.0	13.0	2.0	23.0	14.5

INFORMATION

MATERIALS

Mild Steel, (Stainless Steel
To Special Order),
(Aluminium To Special Order).

FINISHES

Zinc Trivalent Passivate (SZ).

PART NUMBER EXAMPLES

Type / Thread /
Grip Range / Finish =

FRS - M8 - 35 - SZ

(Flat Head, M8,
0.5 to 3.5mm Panel,
Steel, Zinc)

**Closed End and Splined Body Versions Available. Contact our sales department for further details.
For detailed installation guides and performance data visit www.npfasteners.com**